Product Overview

Thank you for purchasing an ipbox. This user manual provides instructions for installing and using your new ipbox. For the latest product information and news, please visit our website at www.vietfacenetworks.com.

Package Contents

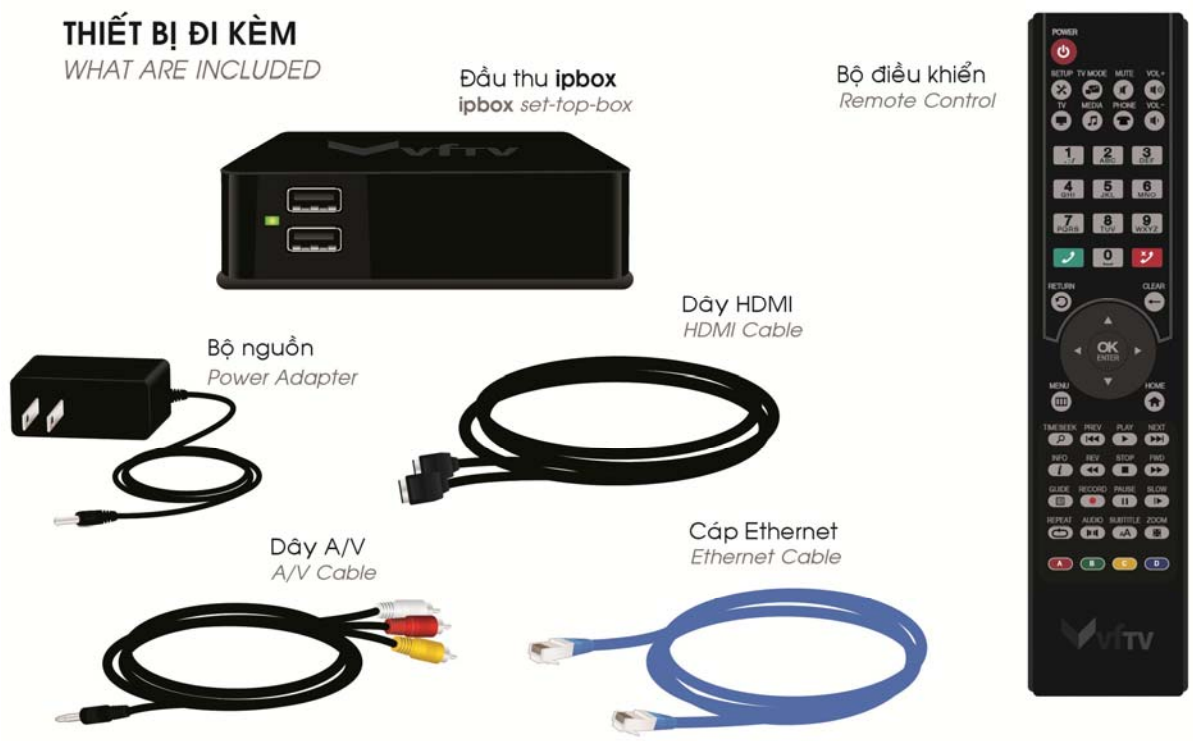

Remote Control

BUTTON	CHẾ ĐỘ / FUNCTIONS
	Chế độ tắt mở đầu thu (turn **ipbox** On - full operation or Off - low power mode)
	Chế độ cài đặt đầu thu (Setup function)
	Chuyển chế độ khung hình TV (Switch TV mode)
	Ngắt tiếng (Mute)
	Tăng giảm âm lượng TV (Volume Up and Down)
	Chuyển sang chế độ TV (Switch to broadcast TV application)
	Chuyển sang chế độ giải trí đa phương tiện (Switch to Media Player application)
	Chuyển sang chế độ gọi điện thoại (Switch to Telephone application)
0 → 9 WXYZ	Số để nhập khi yêu cầu, hoặc chọn kênh (Keypad numbers)
	Chế độ gọi nhận và tắt cuộc gọi (Answer Call or hang up Call)
	Quay lại trang vừa xem (Return to last screen)
	Xóa số và chữ vừa nhập (Delete function)
OK ENTER	Di chuyển con trỏ lên hoặc xuống (Up and Down function) Di chuyển con trỏ sang trái, phải (Left and Right function) OK/ENTER đồng ý, xác nhận, vào trang (OK/Enter function)
	Hiển thị menu chính (Menu function)
	Quay lại màn hình chính (Back to Home)
	Lựa chọn thời điểm xem (Timeseek function)
	Chọn lựa phần trước và phần sau (Previous and Next function)
	Chạy và dừng chương trình (Play and Stop function)
	Tua lùi lại và tua nhanh tới (Rewind and Forward function)
	Tạm dừng và xem chậm chương trình (Pause and Slow function)
	Xem thông tin (Program Information function)
	Lịch phát sóng (Program Guide function)
	Ghi chương trình (Record function)
	Tự động phát lại chương trình (Repeat function)
	Chọn kênh âm thanh (Select Audio mode)
	Phụ đề (Subtitle function)
	Phóng to màn hình (Zoom In/Out function)

Quick Setup

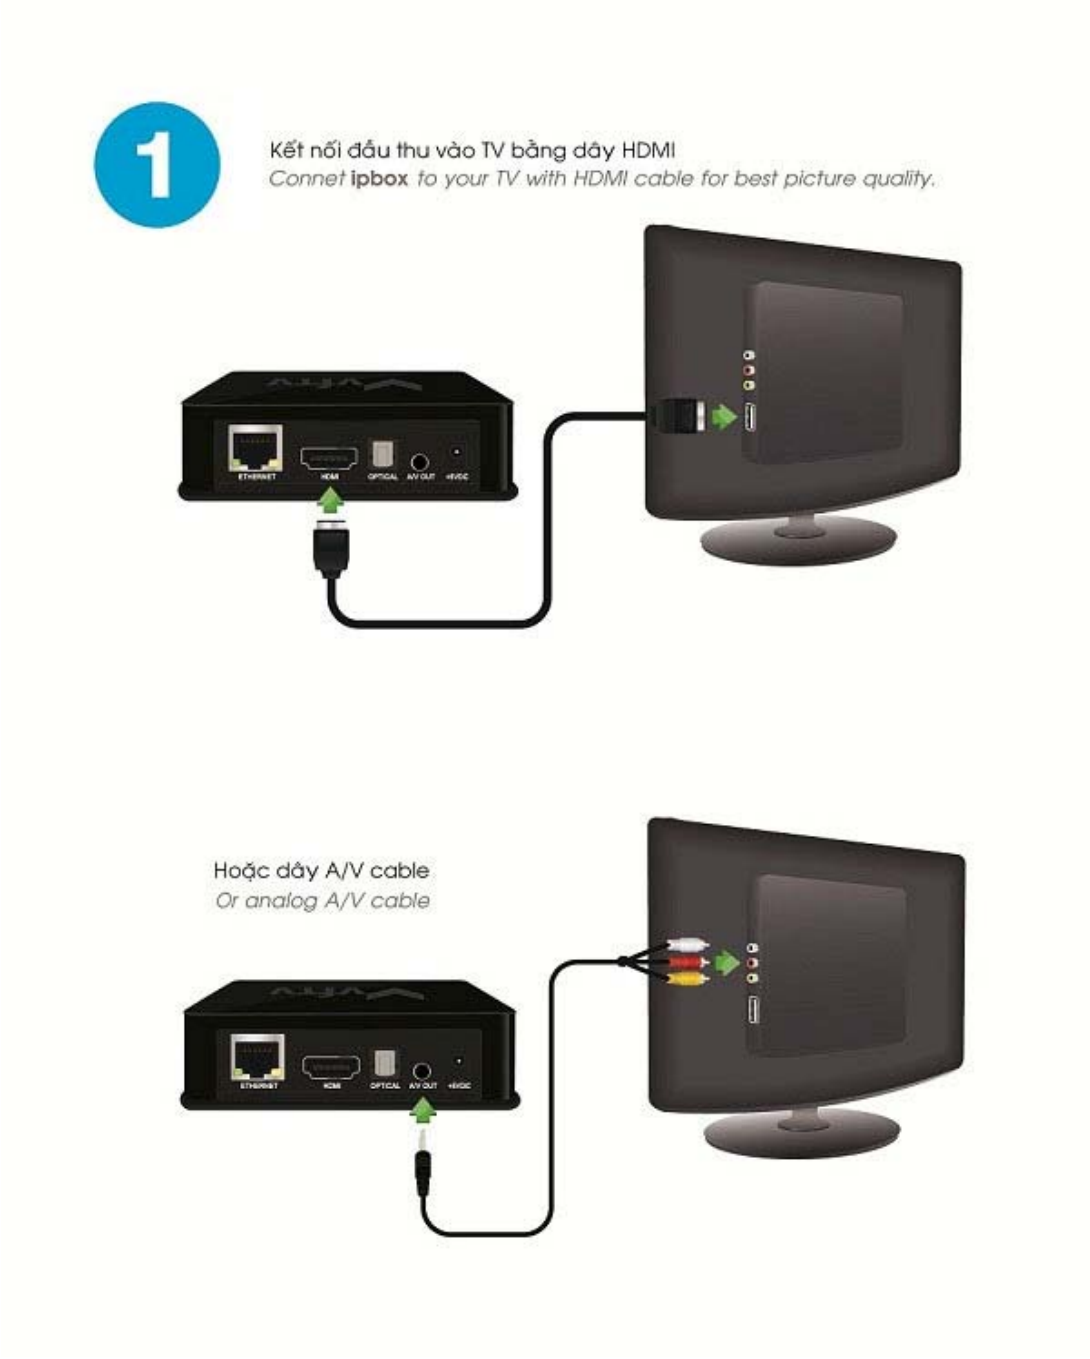
1
Kết nối đầu thu vào TV bằng dây HDMI
Connet ipbox to your TV with HDMI cable for best picture quality.
ETHERNET
HDMI
OPTICAL
A/V OUT
+5VDC
Hoặc dây A/V cable
Or analog A/V cable
ETHERNET
HDMI
OPTICAL
A/V OUT
+5VDC

2 Kết nối **ipbox** với Ethernet switch, hoặc wireless để vào mạng
Connect **ipbox** *to your Ethernet switch or wireless network for Internet access*

Ethernet Cable

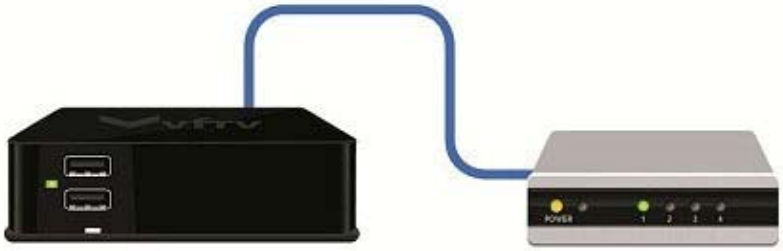

OR

Wi-Fi

OR

Power Line Ethernet

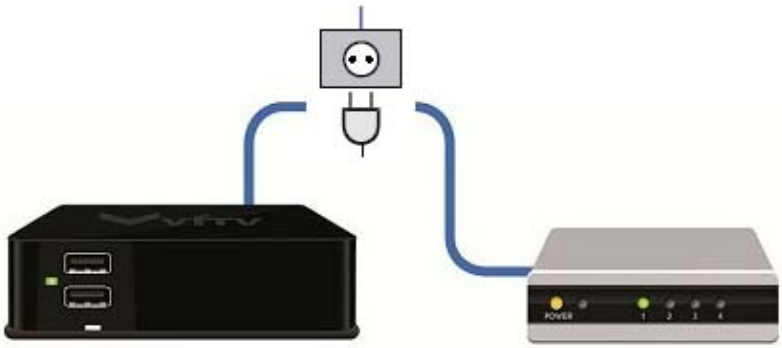

3
Kết nối bộ nguồn vô ipbox và ổ cấm điện
Connet AC adapter to ipbox and wall outlet
ETHERNET
HDMI
OPTICAL
A/V OUT
+5VDC

Home Screen

This is the Home screen of the ipbox. From here you can navigate to different selection to view its content.

- **Shopping Channel –** Shopping channels from our partners.
- **Featured Channel –** Channels of different interests from the Web.
- **VFone –** Talk for free with our VoIP app.
- **Vietface TV –** A 24/7 live broadcast of the premiere Vietface TV.
- **Thuy Nga Production –** Most video DVDs from Thuy Nga Production.
- **Vietface TV Programs –** Pre-recorded video programs from Vietface TV.
- **Live Event –** Watch Live video events here.
- **Sonca Karaoke –** Sing karaoke with Cloud Karaoke from Son Ca Media.
- **Zing MP3 –** High quality music videos from Zing.vn.

- **Settings –** Configure different hardware and software settings for your ipbox.

Settings

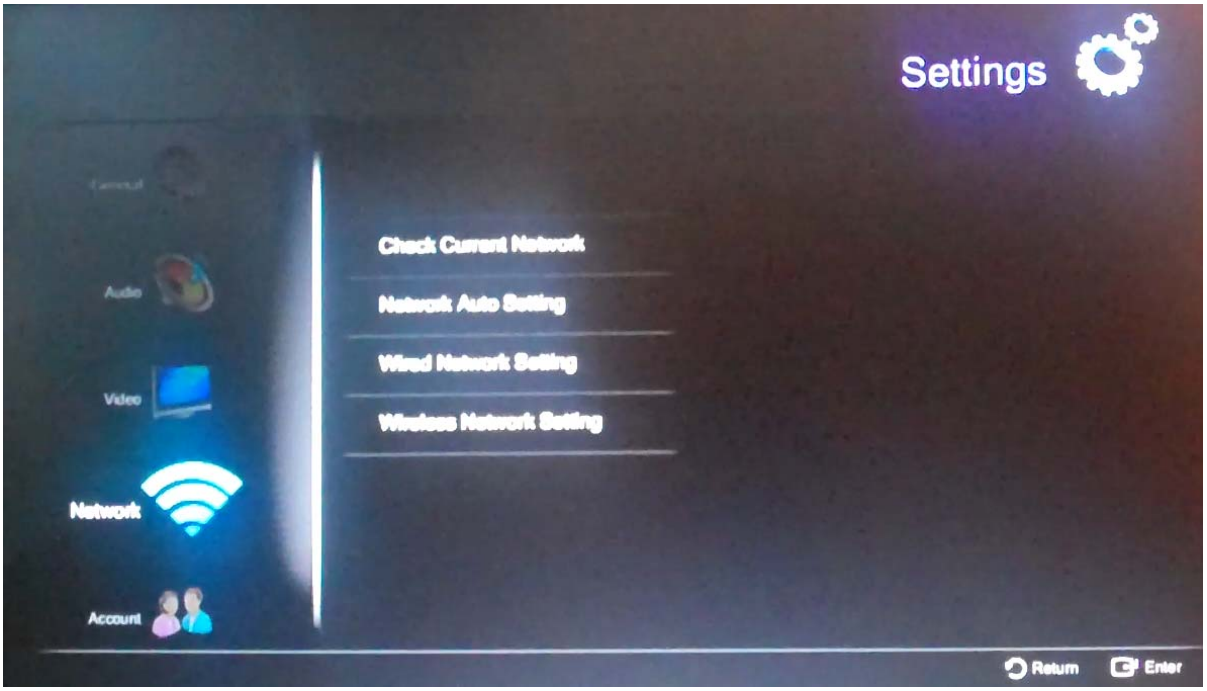

The Settings menu lets you customize your ipbox, set preferences and check status of your subscription account.

- Press Up Arrow, Down Arrow to navigate to different options.
- Press OK to move to right.
- Press Return to go back to previous selection.
- Press Home to return to Home screen.

General

- **Language –** Allow you to select a language to use for displaying menus.
- **Software Version –** Display current firmware version number.
- **Update Firmware –** Allow you to update the ipbox's software either from our server or from a USB memory stick connected to one of the ipbox's USB ports.

- **Reboot System –** Restart the ipbox.

Audio

- **Digital Output –** Allow you to select the type of audio output for Optical and HDMI audio. Default is PCM.
- **Analog Output –** You must enable it if you use the A/V cable to connect to TV. Default is Off.

Video

- **Video Output:**
  - **HDMI –** Allow you to specify the resolution to display. Default is Auto
  - **Composite –** Allow you to specify NTSC or PAL display.
- **Aspect Ratio –** Allow you to specify 16:9 or 4:3 display type.

Network

- **Check Current Network –** Get current status of the ipbox's network connection.
- **Network Auto Setting –** Connect the ipbox to your network automatically. For Wi-fi you will be given a choice of networks to connect if the ipbox cannot connect to a previous connected network.
- **Wired Network Setting:**
  - **Dynamic –** Set up a network connection automatically.
  - **Static –** Allow you to enter parameters to set up a network connection manually.
- **Wireless Network –** Scan all available Wi-fi networks and allow you to select a network to connect. You will need to select a network and enter any password keys.
- If you cannot connect to your network, recheck all the connections or you might want to unplug and plug the power cable of your router/modem and ipbox and select the above steps again.

Account

Display the current status of your account and subscriptions.

Watching Video

We provide you with many entertained video channels to watch. You select them by navigate to them from the Home screen and press OK.

Shopping Channel

Here you will find shopping channels from different partners. More partners will be added. While viewing video press Return or Home button to return to Home screen.

Featured Channels

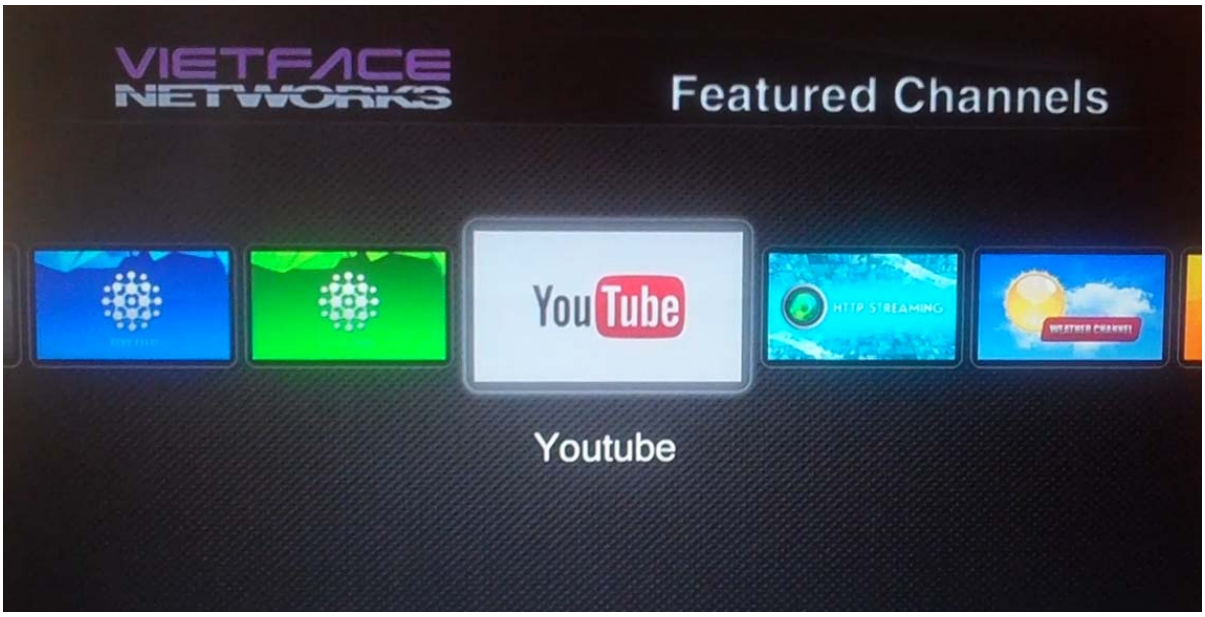

Here are more channels of different interests. These include flickr, Picasa, Youtube, Shoutcast radio, Weather channels and many more.

- Press OK to view the channel and follow the menu on screen.
- Press Return to return to previous menu and Home to return to Home screen.

Vietface TV

This is a 24/7 live broadcast of the premiere Vietface TV channel. While viewing video press Home or Stop button to return to Home screen.

Thuy Nga Production (Subsription Channel)

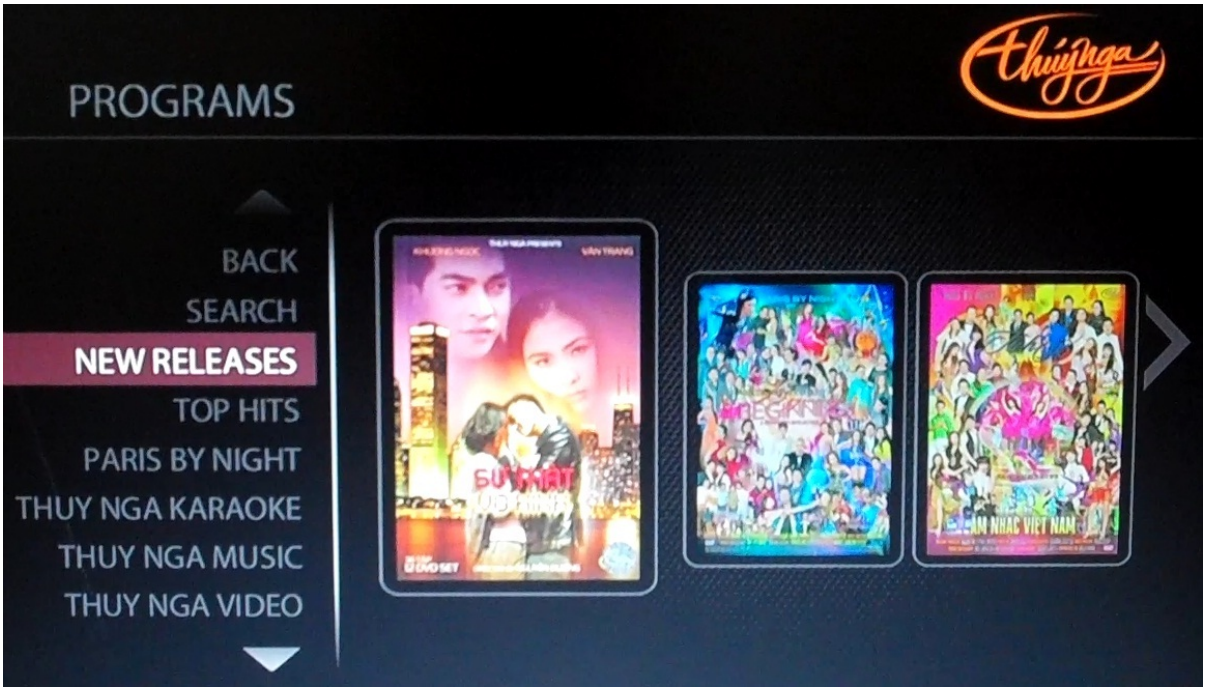

Here you will find most video DVDs from Thuy Nga Production organized in different categories.

- **Back –** Go back to Home screen.

- **Search –** Press OK to search for Album names, Song names. Press Return, go back to previous selection.

  New Releases – Press OK to see newly released DVDs for all DVDs from Thuy Nga Production. Press Left or Right Arrow to navigate to different DVD title then press OK to view its content.

- **Top Hits –** Press OK to see top hit DVDs from Thuy Nga Production. Press Left or Right Arrow to navigate to different DVD title then press OK to view its content.

- **Paris By Night –** Press OK to see Paris By Night DVDs from Thuy Nga Production. Press Left or Right Arrow to navigate to different DVD title then press OK to view its content.

- **Thuy Nga Karaoke –** Press OK to see Karaoke DVDs from Thuy Nga Production. Press Left or Right Arrow to navigate to different DVD title then press OK to view its content.

- **Thuy Nga Music –** Press OK to see Music DVDs from Thuy Nga Production. Press Left or Right Arrow to navigate to different DVD title then press OK to view its content.

- **Thuy Nga Video –** Press OK to see DVDs from Thuy Nga Production. Press Left or Right Arrow to navigate to different DVD title then press OK to view its content.

- **Thuy Nga Comedy –** Press OK to see Comedy DVDs from Thuy Nga Production. Press Left or Right Arrow to navigate to different DVD title then press OK to view its content.

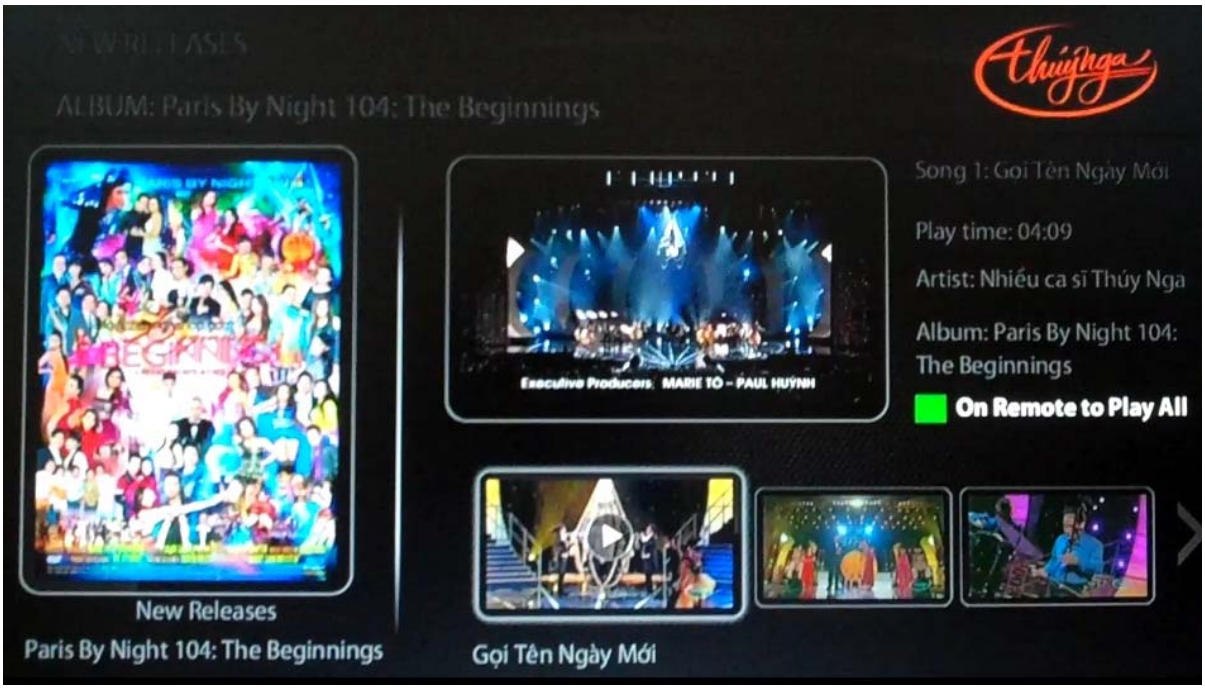
ALBUM: Paris By Night 104: The Beginnings
Song 1: Gọi Tên Ngày Mới
Play time: 04:09
Artist: Nhiều ca sĩ Thúy Nga
Album: Paris By Night 104: The Beginnings
On Remote to Play All
Executive Producers: MARIE TÔ - PAUL HUỲNH
New Releases
Paris By Night 104: The Beginnings
Gọi Tên Ngày Mới

On a DVD content screen,

- Press Left or Right Arrow to navigate to different chapters or titles.
- Press OK to view the title in full screen.
- While in full screen mode, press Return to go back to content screen or Home to go back main Home screen.

To fast forward or backward,

- Press Time Seek, a screen with picture frames and time line is shown.
- Press Left Arrow or Right Arrow to navigate to different time slot.
- Press OK to view video from that time on.

Vietface TV Programs

Here you will find pre-recorded video clips from Vietface TV, organized in different categories.

- Press Left Arrow and Right Arrow to navigate to a category.
- Press OK to view video of available clips.
- Press Home to return to Home screen.

Live Event (Subscription Channel)

Any live events will be announced here. If you want to purchase the event, you can only do that by using a computer and visiting our website at wwww.vietfacenetworks.com. Then tune to this channel at the specified time to watch it live.

Son Ca Karaoke

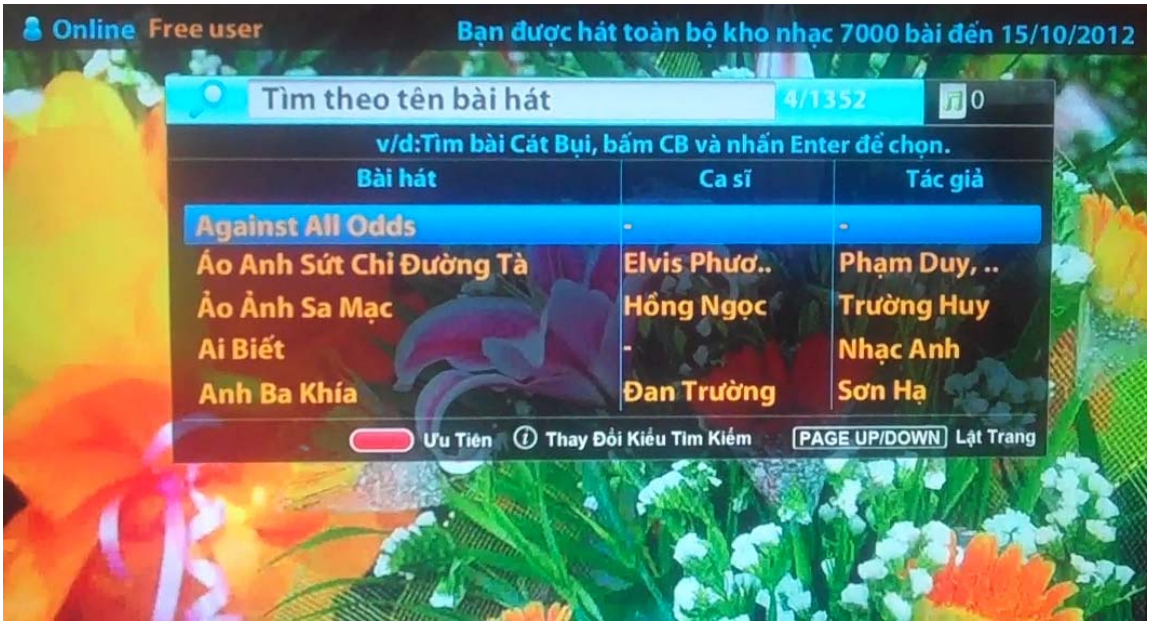

You have up to 1000 Karaoke songs free from Son Ca Media. You can buy more from our website.

- Press Time Seek to bring up the search table, if it is not displayed.
- Press any number buttons to enter text to search for a song or press Up Arrow, Down Arrow to move to a song.
- Press OK to select that song for streaming.

To queue more songs, while a song is playing:

- Press Time Seek to bring up search table to find a song.
- Press OK to select that song to be queued.
- Press Right Arrow to display songs in queue. While at that table you can press "A" button to move a song to top of queue or Clear to remove a song from queue. Press Left Arrow to go back search table.
- Press Return or Time Seek to clear search table.
- If you have a song book you can press its song number directly using number buttons and press OK to add to queue.

Zing MP3

Zing MP3 is a high quality music video channel from Zing.vn. The videos are organized under differenct catagories.

- Press Up Arrow, Down Arrow to go to a category and press OK to select.
- Press Up Arrow, Down Arrow, Left Arrow, Right Arrow to navigate to different songs and Press OK to view.
- Press Return to go back to previous selection or Home to return to Home screen.

Talking with VFone

Besides watching video, your ipbox also allows you to make and receive phone calls. You call for FREE from one ipbox to another ipbox anywhere in the world as long as both ipboxes are connected to the internet. You can also call to any phone numbers in the U.S. and Canada using Google Voice service, currently is free. Talking now becomes truly free.

To make a call between ipboxes you need a VFone number and to call a phone number in the U.S. and Canada you would need a Google Voice number.

- **VFone number** is a unique number assigned to your ipbox - think of it like your telephone number.

- **Google Voice number** is a phone number that you obtain for free along with your Google Gmail account from Google. You can select from a list of available phone numbers based on your desired area code or keep your existing number for a small fee. Log into your Google Gmail email account to sign up.

Associate your Google Voice number with your ipbox

Follow these steps to link your Google voice number with your VFone number so that all calls to your Google Voice number will be forwarded and ring at your ipbox:

- Using any computers, go to www.google.com and select "Gmail" tab on the top of the page.

- Log into your account using your Google email and password.

- Select "MORE" tab at the top and choose "EVEN MORE".

- Go to section "HOME & OFFICE" and select "VOICE".

- Select ⚙ and "SETTINGS" icon on the right of the page.

- Check the box "FORWARDS CALLS TO GOOGLE CHAT". This will forward all incoming calls to your Google voice number to your ipbox. Uncheck other numbers if you do not want to forward to those numbers. If you select other numbers, all incoming calls to your Google voice number will ring your ipbox as well as those numbers you selected.

Sign in to your Google Voice account

You only need to this one time or when you update the ipbox's firmware

- From the Home screen, navigate to VFone and press OK.
- Navigate to "Google Talk Setup".
- Enter your Google email address and password associated with the Google voice number
- Select "Sign Up" and your ipbox should return with a successful message. If not, check your Google email address or password and retry.
- Your ipbox is now ready to make calls using your Google voice number.
  Note: You must dial "1" and area code to make any calls using your Google voice number (1 + area code + phone number).
- Press Return to exit "Google Talk Setup" or press "HOME" to exit "VFone"

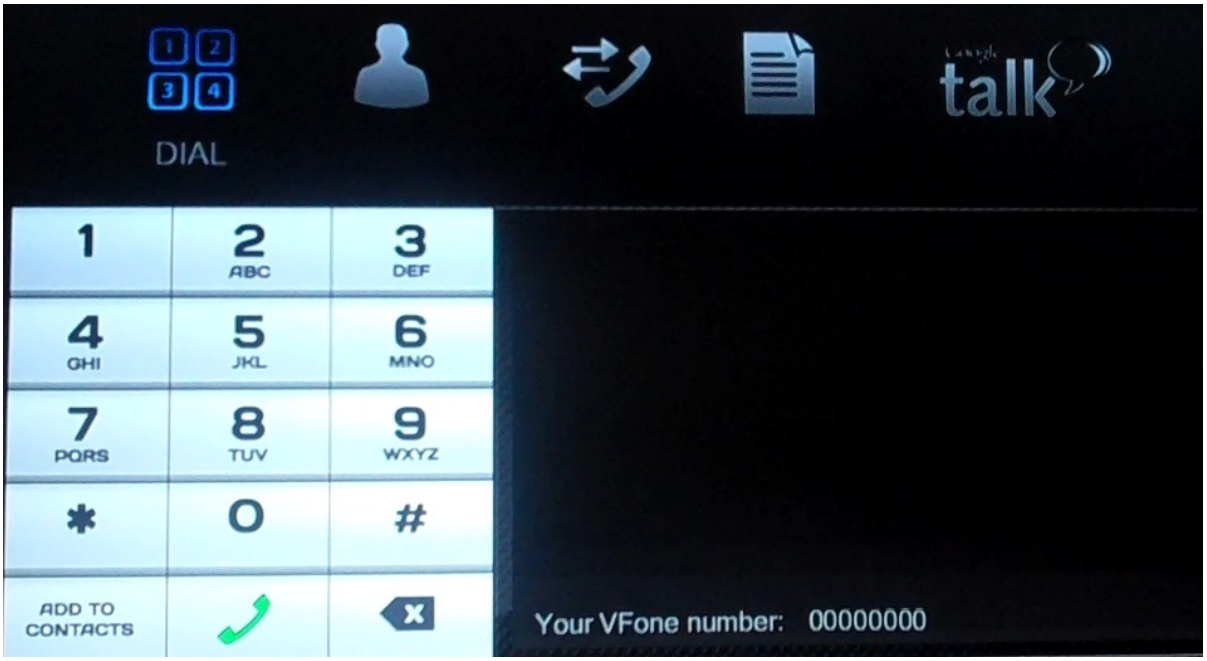

Make Calls using a USB headset

- Make sure you connect a USB headset to one of the ipbox's USB ports.
- Navigate to Dial, press OK.

- Enter a VFone number or a U.S. or Canada phone number then select on the remote control or on the television screen to dial. Wait for the other person to answer and start talking.
- To end call press .
- To exit out of VFone, press Home to return to the Home screen.

Make Calls using a USB Telephone adapter:

- Make sure you connect a USB Telephone adapter (purchased separately from our website) to one of the ipbox's USB ports.
- Connect a phone to the phone port of the USB Telephone adapter using any standard phone cable.
- Use the phone as you normally would. To call another ipbox you would dial its VFone number and to call to any U.S. and Canada numbers you would dial the phone number.

Receive Calls

- With a USB headset, when a call comes in a message will display on your television allowing you to press to answer.
- With a USB Telephone adapter, the phone will ring as normal for all incoming calls and you answer the call as you normally would.